




Insulated Corrugated



Colorbond®
Made for Australia

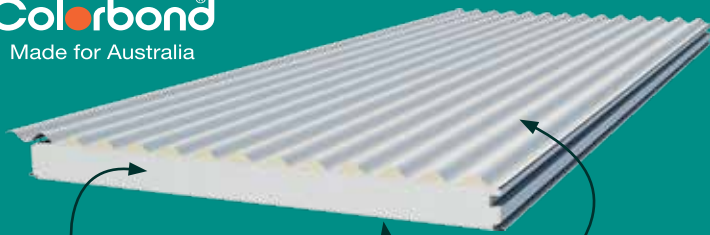

SupaCore® Insulation
Superior Thermal Performance

Colorbond®
Steel Roof & Ceiling

Your next generation corrugated roof

- Longer spans
- Outstanding thermal performance
- Smooth ceiling underside
- Australian made Colorbond® Steel
- Wider coverage 1000mm
- Higher water carrying capacity



Leaders in Thermal & Architectural Building Solutions

Patios with Comfort and Style

Affordable, Simple and Attractive

InsulRoof® is an ingenious combination of roofing, insulation and ceiling in one durable, functional and attractive panel. This all-in-one roofing solution provides a prefinished ceiling-like underside and outstanding cooling performance for comfortable outdoor living.




Roof Colours



Ceiling Colours



Ceiling Finishes

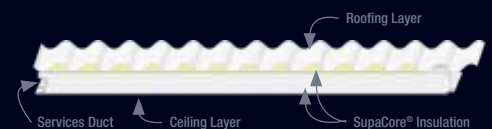

Call 1800 763 707
www.insulroof.com.au

InsulRoof® Domestic Patio Applications - single spans - non-cyclonic

Wind Category	Panel Thickness (mm)	Case A 3 Open Sides	Case B 2 Open Sides	Case C 1 Open Side	Case D Fully Enclosed	Case E Free Standing	Max Overhang*
N1/N2	50	5400	5260	4950	4350	5400	1100
	75	6900	6450	5600	5150	6900	1200
	100	7500	6900	6300	5490	7500	1300
	125	8100	7200	6600	6200	8100	1350
N3	50	5110	4000	3600	3580	5180	1100
	75	6200	5220	4300	3970	6300	1200
	100	6600	5560	4600	4450	6730	1300
	125	7600	5800	5200	4700	7800	1350
N4	50	4330	3300	3000	2730	4570	1100
	75	5120	4160	3680	3250	5420	1200
	100	5450	4500	4000	3700	5760	1300
	125	6150	4800	4200	3850	6500	1350

InsulRoof® Domestic Patio Applications - single spans - cyclonic

Wind Category	Panel Thickness (mm)	Case A 3 Open Sides	Case B 2 Open Sides	Case C 1 Open Side	Case D Fully Enclosed	Case E Free Standing	Max Overhang*
C1	50	4500	4000	3600	3300	4500	1100
	75	5600	4300	4200	3800	5600	1100
	100	6000	4600	4500	4400	6000	1100
	125	6250	5300	4800	4800	6200	1100
C2	50	3800	3000	3100	2700	3800	900
	75	4700	3600	3200	3100	4700	900
	100	5100	3900	3500	3400	5100	900
	125	5300	4200	3800	3600	5300	900
C3	50	2900	2000	2000	1400	2900	700
	75	3600	2200	2150	1500	3600	700
	100	4000	2500	2400	1800	4000	700
	125	4250	2800	2700	2000	4200	700

* Overhangs shall not be greater than 25% of the immediate backspan. The above InsulRoof® span table is for use as a guide only for domestic patio covers attached to one-storey & two-storey homes. For full analysis please ask your builder, installer or engineer to use the InsulRoof® patio engineering available from your local dealer in reference to AS1170.2.

** Limited availability.

^ Darker colours warranted for use in limited regions. Check with your local InsulRoof® dealer for more information.

Metecno Pty Limited, ABN 44 096 402 934. The manufacturer reserves the right to change the specification without notice. Bondor®, Equitilt®, BondorPanel®, FlameGuard®, MetecnoPanel®, InsulWall®, SolarSpan®, MetecnoSpan®, Purline®, Equideck®, InsulLiving®, Metecno, MetecnoSpanTH & MetecnoPanelTH are trademarks of Metecno Pty Limited, BlueScope, Colorbond®, Permagard® and colour names are trademarks of BlueScope Steel Limited. The colours shown in this publication have been reproduced to represent actual product colours as accurately as possible. However, given printing limitations, we recommend checking your chosen colour against an actual sample before placing orders. This advice is of a general nature only. Designers must provide for adequate structural performance and other Building Code requirements. This information is subject to change. Refer to Bondor® website for latest version. Consult Bondor® for your application. BON0291 InsulRoof® Patio Flyer.